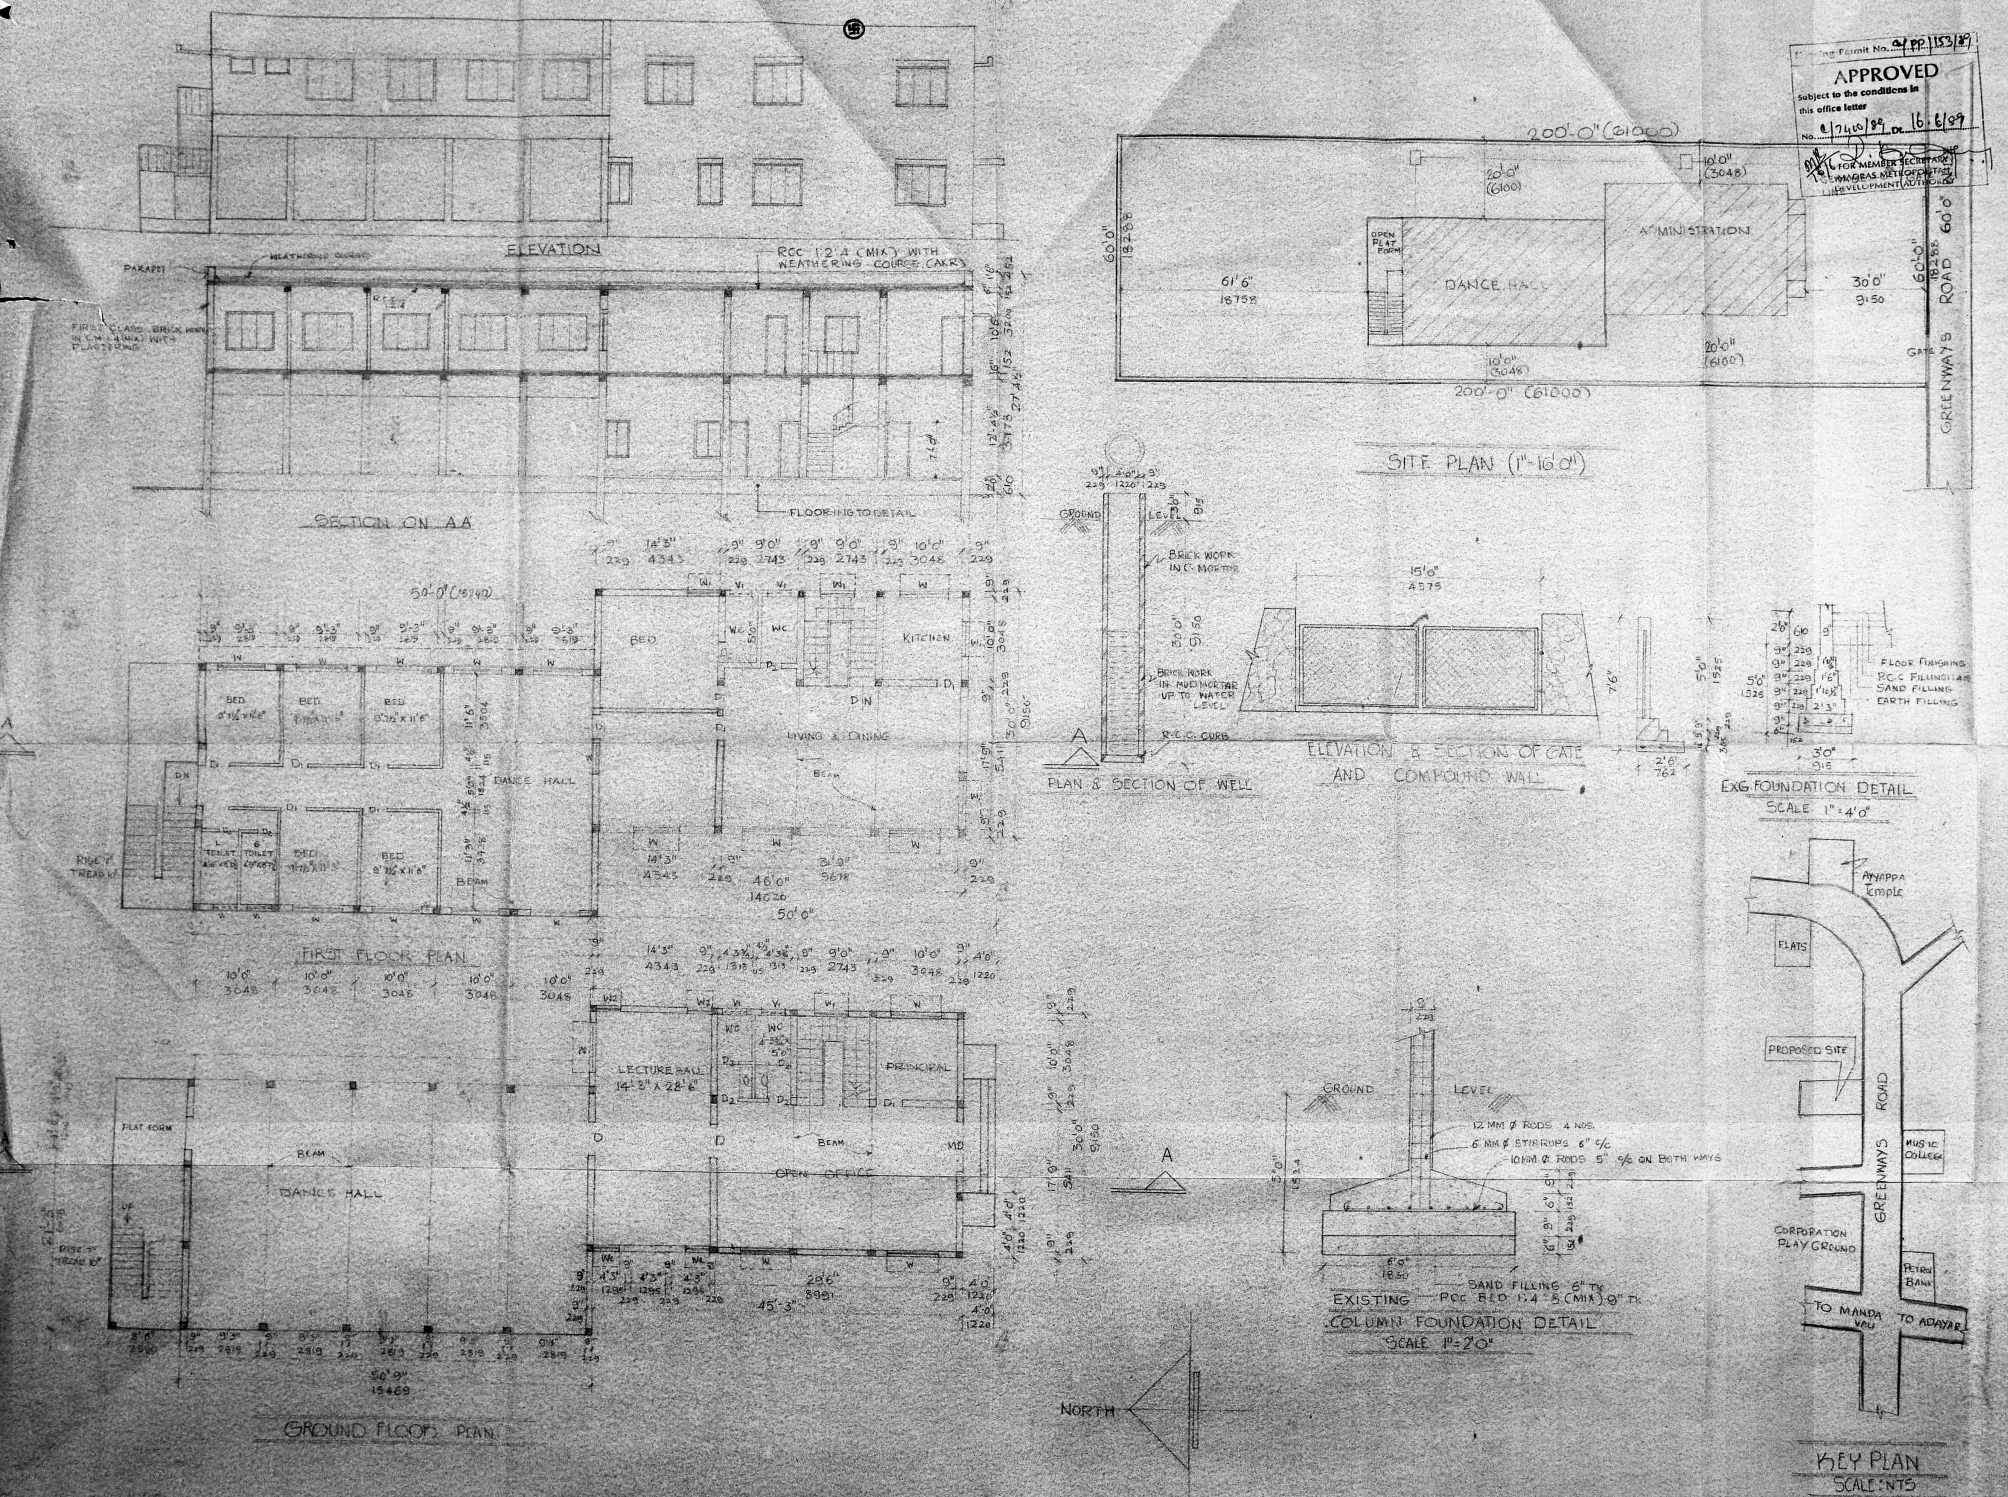

PROPOSED ADDITIONS FOR THE EXISTING BUILDING FOR KUCHUPUDI ARTS ACADEMY AT PLOT NO. R.S.NO 4309/11 IN THE SOUTH WEST CORNER OF 4309/2 MYLAPORE VILLAGE TRIPLICANE TALUCK MADRAS.

SPECIFICATIONS

FOUNDATION: P.C.C 1:4:8 BK WORK IN C.M 1:5 (MIX) AND R.C.C 1:2:4 (MIX)

SUPERSTRUCTURE: BK WORK IN CEMENT MORTAR

FLOORING: P.C.C 1:4:8 (MIX) WITH MOSAIC TILES ON THE TOP

WEATHERING COURSE: BRICK JELLY IN LIME MORTAR WITH A.R. TILES ON THE TOP

JOINERY: BEST INDIAN TEAK WOOD.

SCHEDULE OF JOINERY

MD	MAIN DOOR	6'0" x 7'0"	1830 x 2135
D	DOORS	4'0" x 7'0"	1220 x 2135
D1	DOORS	3'0" x 7'0"	915 x 2135
D2	DOORS	2'6" x 7'0"	762 x 2135
W	WINDOWS	6'0" x 5'0"	1830 x 1525
W1	WINDOWS	4'0" x 5'0"	1220 x 1525
W2	WINDOWS	3'0" x 5'0"	915 x 1525
V	VENTILATORS	4'-0" x 2'-0"	1220 x 610
V1	VENTILATORS	3'-0" x 2'-0"	915 x 610

PROPOSED COLOUR SHOWN THUS:

ROAD COLOUR SHOWN THUS:

SITE COLOUR SHOWN THUS:

EXISTING COLOUR SHOWN THUS:

AREA STATEMENT

PLOT AREA	12000 SFT - 1115.24 SQM
EXISTING GROUND FLOOR AREA	2880 SFT - 267.65 SQM
EXISTING FIRST FLOOR AREA	1380 SFT - 128.25 SQM
PROPOSED AREA	1500 SFT 139.40 SQM
TOTAL AREA	5760 SFT 535.30 SQM

Vempati Chinna Satyam

OWNER

SHEILA SRI PRAKASH
B.ARCH. AIIA. M.C.A.
C.A. No. R.A.62/88
SHILPA ARCHITECTS & INTERIOR DESIGNERS
64, 3RD MAIN ROAD,
G. NAGAR, MADRAS-600 020

ARCHITECT

DRN: P. MANICKAM
CHKD:
JOB NO: SH/AA/542/2/88
SCALE 1"=8'0"
DATE: 10-2-88

shilpa
ARCHITECTS & INTERIOR DESIGNERS
64. III MAIN ROAD,
GANDHINAGAR, ADAYAR,
MADRAS-20.